
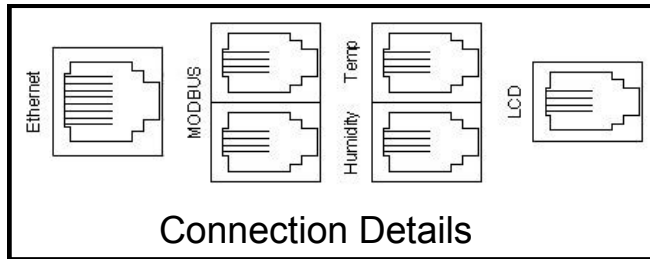
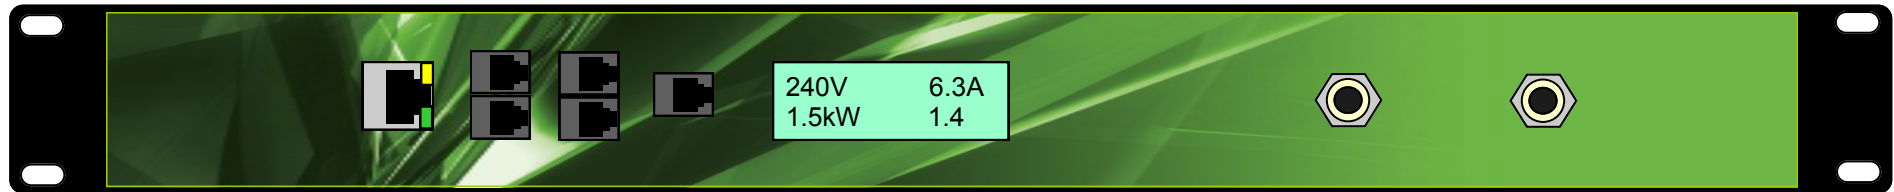


IPL-001-IP1-3C 1U Horizontal 10 x C13 2 x C19 32Amp

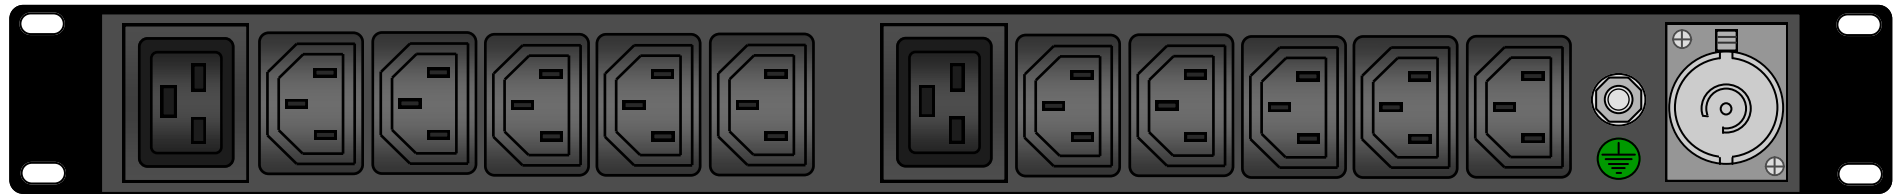

Provided with with 3 metre lead 3x4.0mm² HO7 Cable Neutrik 32Amp to IEC309 32Amp Commando Part Number IPL-PL32/3. Other lengths and terminations are available.

Body Dimensions: 44.5mm wide x 100mm deep x 482.6mm
Fixing Centres: 465 mm
Material: Mild Steel
Finish: Black powder coat
Fixing Method: End Brackets
Protection: Thermal Trip per group of 5C13 1C19
Indicator:
Earthing: M6 Earth stud to end
Rating: 32A @ 240v AC
Special Requirements: None

Input: Neutrik 32Amp Chassis Connector
Output: 10 x C13 2 x C19
Fuse Rating: 5C13 & 1C19 @ 20Amp As standard
Estimated weight: 4 Kg
Standards: Manufactured in accordance with BS EN 60950-1
WEEE: Compliant
RoHS: Compliant
CE: Compliant
Max Op Temperature: -10° to +50°C



1U 10 x C13 2 x C19

Rev :-

IMC

DO NOT SCALE

© 2015 This drawing and the works depicted are the copyright of IPT Limited and may not be reproduced or amended except by written permission. No liability will be accepted for amendments made by other persons.

021115